

Final Plate Cleaner (FPC) – Automated plate cleaning



Benefits of the FPC

Benefits of the Final Plate Cleaner (FPC):

- Central or local usage of the FPC
- Simultaneously cleaning of up to 4 plates
- Time and cost effective, saving of man-hours
- Less than 1.5 minutes for one cleaning cycle including air drying
- Controlled process with defined usage of water and soap
- Longer lasting flexo plates due to contactless cleaning process
- Eco-friendly system, less consumption of water and soap
- Short distances, less travel for the machine operator
- (Applies to local usage of the FPC)

Water and soap consumption of the FPC / Optional Feature


Usage per square meter flexo plate:

- Consumption of water: 1.4 - 1.6 litre/m²
- Consumption of cleaning agent: 0.03 - 0.05 litre/m²

Optional Feature – Air drying module:

- Without using the air dryer there will remain some moisture on the plates
- The air dryer will extend the cleaning process to less than 1.5 minutes in total
- An additional electrical connection of 3 kW is needed
- Plates can be stored immediately, right after the drying process

Operation of the FPC System

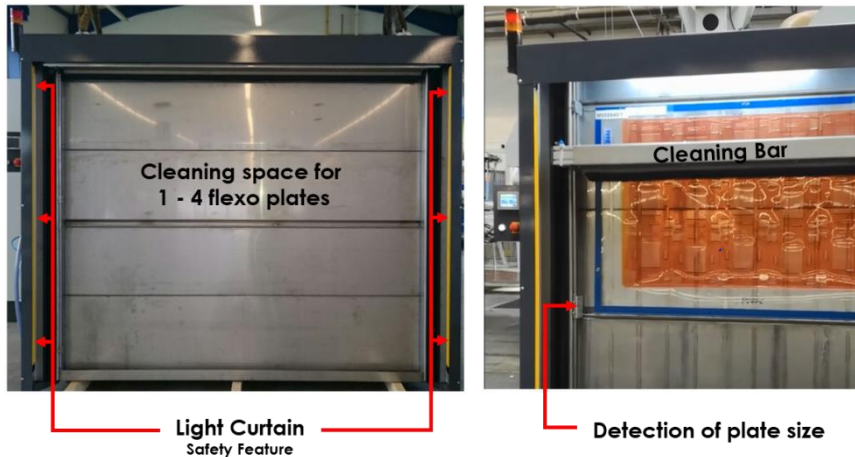

Cleaning Process:

- Save and easy to operate due to light curtain
- Automatic plate size detection
- No waste on additional water or soap, eco-friendly
- Fast and reliable process




Touch-Panel:

- Self-explanatory and easy to use
- English or German language
- Information on system activity

Customized to your specific needs:

- Available in three working widths: 2,100 / 2,800 / 3,200 mm
- Heights: 1,400 / 1,600 mm

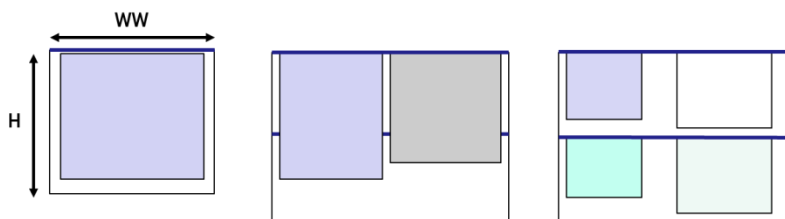

Please contact us for your customized solution, for your individual offer or further information.